

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 June 2001 (28.06.2001)

PCT

(10) International Publication Number  
**WO 01/46734 A1**

(51) International Patent Classification<sup>7</sup>: G02B 6/42, 6/26

(21) International Application Number: PCT/US00/33511

(22) International Filing Date:  
12 December 2000 (12.12.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/468,410 20 December 1999 (20.12.1999) US

(71) Applicant: COGENT LIGHT TECHNOLOGIES,  
INC. [US/US]; 26145 Technology Drive, Santa Clarita,  
CA 91355-1137 (US).

(72) Inventors: FERRANTE, Ronald, A.; 30566 N. Ap-  
palachian Drive, Castaic, CA 91384 (US). LI, Kenneth,  
K.; 217 Laurel Avenue, Arcadia, CA 91006 (US).

(74) Agents: REPPER, George, R. et al.; Rothwell, Figg,  
Ernst & Manbeck, P.C., 555 13th Street, N.W., Suite 701-E,  
Washington, DC 20004 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:  
— With international search report.

*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*

(54) Title: COUPLING OF HIGH INTENSITY LIGHT INTO LOW MELTING POINT OPTICAL FIBERS

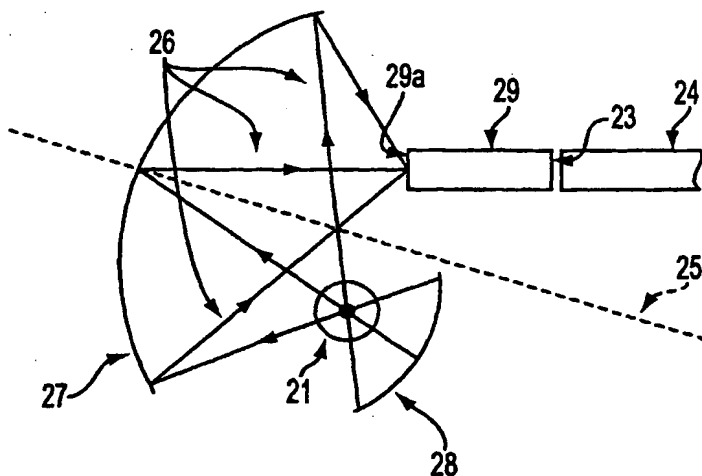

(57) Abstract: A fiber optic illumination system with increased power handling capabilities for low melting point fiber optics (24) uses an optical homogenizer (29). Homogenizers of the present invention preferably comprise a rod with polygonal cross-section. The output intensity of the optical homogenizer (29) is substantially uniform such that the output fiber optic (24) will not be damaged by hot spots created by non-uniform intensity light (26).

WO 01/46734 A1

BEST AVAILABLE COPY

BEST AVAILABLE COPY

## COUPLING OF HIGH INTENSITY LIGHT INTO LOW MELTING POINT OPTICAL FIBERS

**Nature of the Invention**

5           The invention relates to fiber optic systems. Particularly, the invention provides a method and apparatus for coupling high intensity light into a low melting point optical fiber using a homogenizer to provide a more uniform intensity distribution.

**Background of the Invention**

10           In the field of fiber optic illumination systems, it is known that optical power output from arc lamps, such as xenon lamps and metal halide lamps, can reach hundreds of watts. The fiber optic that transmits light from these light sources to the applications consists of single fibers or fiber bundles which can be made out of quartz, glass, or plastic. Plastic fibers intrinsically cannot operate at high temperature. While single glass and quartz fibers can operate at relatively  
15 higher temperatures, fiber bundles containing such fibers are still temperature sensitive due to the epoxy in between the individual fibers.

          Light emitted from the arc lamp is usually coupled to a fiber optic by the use of mirrors and lenses either alone or in combination. To preserve the brightness of the arc as much as possible, an optimized optical system will produce an image of the arc on the fiber optic with as  
20 small a spot as possible and constant magnification. Due to the intrinsic nature of the arc itself, the intensity is non-uniform, as a result, the image of the arc at the fiber optic will also be non-uniform, thus producing "hot spots." These hot spots may produce intensities higher than the material damage threshold of a particular fiber optic at a localized spot before the average intensity across the fiber reaches such value. This causes substantial damage to the fiber optic.  
25 Therefore, the total power which can be delivered through the fiber optic for a non-uniform image is necessarily less than that for a uniform image. Thus, it is desirable to have an input intensity profile as uniform as possible such that the overall power can be increased before the damage threshold is reached at any single point. This will allow more light to be coupled into the fiber optic without damage.

30           Several methods have been used to couple more power into low melting point fibers. U.S. patent No. 5,898,802, the specification of which is herein incorporated by reference, discloses a method of using fused bundles to spread the intensity profile of light beam, thus

reducing the peak intensity and allowing more light to be coupled into the polymer fiber.

Although the use of the fused bundle spreads the intensity profile, it has a limit and does not totally produce a flat profile. U.S. patent No. 5,761,356 discloses the use of a spatial filter to filter out any unguided mode in the input beam to the output of a low melting point fiber. While  
5 this approach reduces the dissipation of heat from unguided modes at the input end of the fiber, the profile of the light is still non-uniform, and thus does not produce optimum results.

It is therefore an object of the present invention to provide a method and apparatus for providing a uniform intensity profile light beam to an optical fiber.

Further, it is an object of the present invention to provide a method and apparatus for  
10 providing efficiently coupling high intensity light into low melting point optical fibers.

### **Summary of the Invention**

The present invention provides a method and apparatus for coupling high intensity light into a low melting point optical fiber using a homogenizer which is a section of an optical  
15 waveguide with a polygonal cross-section. The homogenizer allows a low melting point fiber to be positioned away from the focus of the coupling system, and simultaneously provides a mixing mechanism in which the non-uniform intensity profile of the input light will become substantially uniform at the output. This allows more light to be coupled into the fiber optic before any portion of the fiber reaches the damage threshold. Preferably, the homogenizer is a  
20 section of an optical waveguide having at least a partial polygonal cross-section.

### **Brief Description of the Drawings**

FIG. 1 is a schematic diagram of a prior art fiber optic illuminator having a parabolic reflector.

25 FIG. 2 is a schematic diagram of a prior art fiber optic illuminator having an elliptical reflector.

FIG. 3 is a schematic diagram of a prior art fiber optic illuminator having an off-axis toroidal reflector.

FIG. 4 is a graph of a typical intensity profile of the output light at the target spot of a  
30 illumination system showing a gaussian-like distribution.

FIGS. 5A and 5B are schematic diagrams of homogenizers having square cross-sections as employed in embodiments of the present invention.

FIG. 6 graphically shows the plot of the intensity profile of the output light from a square homogenizer, such as the one depicted in FIG. 5, which plot shows that the output intensity profile is substantially uniform.

FIG. 7 graphically shows the plot of the intensity profile of the output light from a cylindrical homogenizer, which plot shows that the output intensity profile is peaked.

FIGS. 8A-8F are schematic diagrams of a variety of polygonal cross-sections which may be employed in embodiments of the present invention to provide uniform intensity profile outputs.

FIGS. 9A and 9B are schematic diagrams of a homogenizer of the present invention comprising an input end square rod and an output end round rod.

FIG. 10 is a schematic diagram of a homogenizer of the present invention having a square input end and round output end joined with a smooth transition.

FIG. 11 is a schematic diagram of a square cross-section homogenizer of the present invention which tapers from a smaller entrance cross-section to a larger exit cross-section.

FIG. 12 is a schematic diagram of a homogenizer of the present invention having a square cross-section input which tapers to a round cross-section output having a substantially larger area.

FIGS. 13A and 13B are schematic diagrams of an octagonal homogenizer used in embodiments of the present invention for matching to a round output fiber with high efficiency by approaching the cross-sectional area of the circular fiber with a circumscribed polygon.

FIG. 14 is a schematic diagram of a fiber illumination system of the present invention having an off-axis configuration and a homogenizer comprised of a single waveguide.

FIG. 15 is a schematic diagram of a fiber illumination system of the present invention having an off-axis configuration and a homogenizer comprised of a polygonal rod together with a round rod.

FIG. 16 graphically shows the measured intensity profile from a square homogenizer.

### **Detailed Description of the Invention**

The internal components of a common fiber optic illuminator known in the art are shown in FIG. 1. It comprises an arc lamp 1, a parabolic reflector 2, a focusing lens 3, and an output fiber optic 4. Depending on the applications, the lamp can be of a variety of types, including xenon arc lamps, metal halide arc lamps, or halogen lamps. The emission area of the lamp is

placed at the focus of the parabolic reflector 2, which is located along the reflector's optical axis 5. The output of the lamp is then collected by the parabolic reflector 2 and directed in parallel rays toward the lens 3. The parabolic reflector can be coated to preferentially reflect certain wavelengths. For example, for visible applications, a cold coating is used in which the UV and infrared radiation are transmitted and not reflected such that only the visible portion of the spectrum is directed towards the output. The parallel beam output from the reflector 2 is then focused to a smaller spot by the focusing lens 3 onto the end of the output fiber optic 4.

FIG. 2 shows another configuration of such an illuminator using an elliptical reflector 6. The emission area of the lamp 1 is placed at one focus of the reflector 6 and the output fiber optic 4 is placed at the other focus of the reflector 6.

Both the configurations in FIGS. 1 and 2 have a common drawback in that the magnification of the system is greater than one and changes from one angle to another, thus reducing the brightness of the output focused spot. FIG. 3 depicts an off-axis system in which the light is imaged onto the output fiber optic 4 by the primary reflector 7. As discussed in U.S. patents 4,757,431, and 5,430,634, the specifications of which are herein incorporated by reference, such an off-axis configuration produces a magnification of approximately 1:1 which is substantially constant over all angles, thus preserving the brightness of the original light from the lamp 1. Primary mirrors suitable for such an off-axis configuration can be of several known geometric shapes, including spherical, ellipsoidal, and toroidal. This configuration has provided systems with higher output than other systems with the same lamp 1. In this configuration, the output can be further increased by including the use of a retro-reflector 8 by which the light emitted at the opposite side of the primary mirror is reflected back into the direction of the output. Similar to the previous cases, the reflector can also be coated for specific applications.

FIG. 4 shows a typical intensity profile of the light image formed at the focal spot, the input end of the output fiber optic, in the systems depicted in FIGS. 1-3. It is usually circularly symmetric and "gaussian-like" in which the intensity at the center is higher than at the sides. Although the intensity at the center is high, due to the small area occupied, the total energy within this peak is relatively small and most of the energy is actually resided away from the center with lower intensity. Optical fibers are generally susceptible to heat damage at their input surface. The temperature at which such damage begins is related to the type of material which comprises the fiber. For example, for single optical plastic fibers, the typical operating temperature is less than 85°C. Due to the low thermal conductivity of the plastic, the high peak

intensity of the focal spot creates localized heating at the center of the output fiber optic, thus damaging the fiber. For high output operation with these low melting point fibers, the present invention creates a uniform profile in the focused spot which provides maximum coupling of light into the fiber optic without the danger of localized heating. This improves coupling efficiency and prevents premature damage to the fiber optic.

FIGS. 5A and 5B show embodiments of the present invention in which the homogenizer is a light conducting rod with a square cross-section. FIG. 5A shows a homogenizer, which is a rod 9 without cladding in which the total internal reflections occur at the glass to air interface. This rod can be made from quartz for high power applications. For lower power application, glass or plastic can be used. This rod consists an optical axis 5, an input surface 10 and an output surface 11, which are substantially perpendicular to the optical axis. The length is chosen such that the output intensity profile is substantially uniform. FIG. 5B shows a homogenizer, which is a rod 9 with both core 12 and cladding 13, as is common for a regular fiber optic, where the reflections will be at the core to cladding interface 14. Light entering at the input surface 10 will be guided along this square rod to the output surface 11 with multiple reflections at the interface 14. The net results of these multiple reflections will have an effect of mixing the light and changing its intensity profile, in this case, to a substantially uniform profile.

A computer simulation was performed on this square rod homogenizer using a point source at the input surface. For the simulation, the dimensions of the rod were a 4mm X 4mm cross-section and 30mm length. The intensity profile at the output surface was recorded. FIG. 6 shows the results of the simulation. As shown by the figure, the intensity profile is substantially uniform. In contrast, when a common rounded rod, having a 4mm diameter and 30mm length, was used in the simulation, a non-uniform output was produced. The output profile has a sharp peak at the center as shown in FIG. 7 (corresponding to FIG. 6). This comparison shows that a square rod is suitable for producing a uniform intensity profile while a round rod is not.

Experiments were performed using light output from a small fiber optic simulating a point source as the input to the homogenizer and the output intensity profiles were scanned. The results confirmed the computer simulations. FIG. 16 shows the experimental results, measuring the output power distribution of a 4mm square by 5mm square 35mm length fused silica rod. Except for the results at the (4.4) corner, the distribution confirms the computer model. Corners can be distorted due to rounding during fabrication.

Further investigation has subsequently shown that various polygonal cross-sectioned shapes, including those depicted in FIGS. 8A-8F, can also be used for producing a uniform intensity profile. It will be apparent to one skilled in the art that the present invention is not limited to homogenizing waveguides having cross-sections as depicted in the figures. Countless  
5 polygonal cross-sections may be employed within the spirit of the invention, including ones having many sides and unequal length sides. For ease of manufacture and efficient coupling into output fiber optics, which typically are round, waveguides having cross-sections of regular polygons of up to ten sides are preferred.

The maximum amount of light that can be coupled into an output fiber optic, from a  
10 substantially uniform intensity profile spot such as those produced by homogenizers of the present invention, will depend upon the damage threshold intensity of the fiber and whether the fiber's cross-sectional area closely matches that of the homogenizer's output. For coupling maximum amount of light into a round fiber optic, the full input surface should be fully utilized which requires the output of the light mixing optical element to approach a round object of the  
15 same diameter. This can be achieved in a variety of ways while staying within the spirit of the present invention. FIG. 9A shows an embodiment of the present invention comprising a homogenizer in which the input surface cross-section is square for proper light mixing. The output from the square rod 16, which has a uniform intensity profile, is coupled into a round rod 15, which further mixes the light from the square shaped input into a round shaped output. The  
20 area of the square fitted inside a circle, as must be done to ensure transmission of all light, is only 64% as shown in FIG. 9B.

A computer simulation was performed using a square rod having a 3mm X 3mm cross-section and a length of 10mm feeding into a round rod of diameter of 4.4mm and a length of 10mm. A computer simulation of the intensity profile at the square rod to round rod interface  
25 showed the intensity profile at the output of the round rod to be substantially uniform and fill the whole circular cross-section. Such a profile is particularly suitable to be used as the input to an output fiber optic because it substantially eliminates hot spots.

Another embodiment of the present invention is shown in FIG. 10 in which a single optical element is comprised of a rod 9 having a smooth transition from a square cross-sectioned  
30 input surface 10 to a circular cross-sectioned output surface 11.

For applications where the numerical aperture of the output is desired to be different from the input, the homogenizer can be a tapered optical element. In addition, the square cross-

sections can be transitioned, like the embodiment shown in FIG. 10, to elliptical, rectangular, or other polygonal cross-sections to alter the intensity profile of the focal spot, to match the output shape of the target, or to change the angular distribution of the transmitted light.

FIG. 11 shows an embodiment in which the input cross-sectional area is rectangular and is smaller than the output cross-sectional area. In this case, the numerical aperture of the light exiting the output surface 11 is smaller than the numerical aperture of the light entering the input surface 10. FIG. 12 shows still another embodiment of the present invention having a rectangular cross-section input surface 10 and a larger circular cross-section output surface 11. Although both the illustrations above shows output cross-sectional areas larger than the input cross-sectional areas, the reverse can be used with larger input cross-sectional areas where appropriate for certain applications, such as for image projection systems.

Although the homogenizers as shown in FIG. 9 and 10 produce the desirable results, the method of making such configuration may be expensive. FIG. 13A shows an octagonal homogenizer in which it has substantially the same advantageous mixing properties as the other shapes. But when used with a circumscribing round output fiber optic 16, the overlap area depicted in FIG. 13B is 90% which would be sufficient in many areas of application.

FIG. 14 depicts another preferred embodiment of the invention. It consists of a lamp 21 aligned in an off-axis configuration with a toroidal concave mirror 27 as the primary reflector. Various lamp types can be employed, including metal halide, xenon, mercury, or mercury-xenon. Such an off-axis configuration is discussed in detail in U.S. Patent No. 5,430,634 which has previously been incorporated by reference. For certain applications, a spherical concave or a ellipsoidal concave primary reflector 27 can alternatively be used. This concave reflector 27 can optionally be coated with a multi-layer dielectric film which reflects only the visible light and allows the UV and IR to pass through. Thus, only the visible radiation is focused onto the homogenizer input surface 29a. A retro-reflector 28 is used for increasing the output of the system by reflecting the light from the other side of the lamp back into the primary reflector 27. This configuration produces magnification of approximately 1:1 for all angles of light emission, thus preserving the brightness of the arc when imaged onto the homogenizer. The arc of the lamp 21 and its image from the retro-reflector 28 is focused, as demonstrated by the lights rays 26, onto the input surface 29a of the homogenizer 29, which is a tapered polygonal rod, such as a square rod.



By way of illustration, at the image point is placed a homogenizer 29 comprised of a tapered square rod, the input surface 29a having sides with length of 2 mm. In this case, the primary reflector 27 has a numerical aperture of 0.7, and a 350W metal halide lamp is used. The output fiber optic 24 is a fused bundle of optical fibers with diameter of 5mm and an operating numerical aperture of 0.5. The square output surface 23 of the homogenizer 29 has sides with length of 3.5mm and the total length of the tapered square rod from input to output is 35mm. This taper ratio gives an output numerical aperture of approximately 0.41 which is slightly smaller than that of the fiber bundle, thus giving some margin for efficient coupling and lowering the propagation loss inside the fiber optic. However the length or input/output area ratio for the homogenizer can be varied to provide the optimum match in numerical aperture for any output fiber optic 24. In this case, the intensity of the output does not reach the damage threshold of the output fiber. As a result, coupling from the square output surface to the round input of the output fiber bundle 24 is not an issue.

Various alterations can be made to the above embodiment to tailor it to the specific needs of the system. For instance, the output fiber 24 can be any one of a single plastic fiber, a plastic fiber bundle, a glass fiber, or a glass fiber bundle. Similarly, depending on the power of the lamp 21, the homogenizer can be made of quartz for high power applications, or low temperature glass or even plastic for lower power applications, and either cladded or uncladded.

In another embodiment of the invention depicted in FIG. 15, when a lamp 21 having a higher power output is used, a round rod 22 can be inserted between the output surface 23 of the homogenizer 29 and the output fiber 24 to lower the intensity peaks by spreading the output from the square cross-section into the round cross-section. As shown in FIGS. 9C and 9D, this helps to more uniformly distribute the light intensity.

While it is illustrated and described in considerable detail herein, the invention is not to be limited to such details as have been set forth except as may be necessitated by the claims. The invention having been thus described, it will be apparent to those skilled in the art that the embodiments of the invention may be varied and modified in many ways without departing from the spirit and scope of the invention. Therefore, any and all such modifications are intended to be included within the scope of the following claims.

30

**CLAIMS**

1. A method of transmitting light from a light source to increase the power handling capability of optical fibers, comprising the steps of:  
emitting light having a light intensity profile which is non-uniform;  
5 homogenizing said intensity profile to redistribute the light such that the profile is substantially uniform; and  
transmitting the redistributed light into at least one optical fiber.
2. The method according to claim 1, wherein the non-uniform intensity profile is  
10 gaussian-like.
3. The method according to claim 1, wherein the redistributing of said intensity profile is performed using an optical waveguide having an optical axis, and a polygonal cross-section at least partially along said optical axis.  
15
4. The method according to claim 3, wherein said polygonal cross-section has up to ten sides.
5. The method according to claim 3, wherein said optical waveguide further  
20 comprises a substantially circular cross-section at least partially along said optical axis.
6. The method according to claim 3, wherein along the optical axis of said optical waveguide, the polygonal cross-section smoothly transitions to a substantially circular cross-section.  
25
7. The method according to claim 3, wherein the waveguide has  
a length along the optical axis;  
a first and second surface, each surface placed at opposite ends of the length, and each having an area; and  
30 said first and second surfaces having different areas.

8. The method according to claim 7, wherein along the length of said optical waveguide, the polygonal cross-section smoothly transitions to a substantially circular cross-section, and the area of the first surface smoothly transitions to the area of the second surface.
- 5 9. The method according to claim 1, wherein said step of emitting light includes condensing light from a point source.
- 10 10. The method of claim 1, wherein said homogenizing is carried out by a waveguide, said waveguide comprising:  
10 a homogenizer for mixing said light intensity profile received at an input end of the waveguide; and  
at least one optical fiber which is temperature sensitive, connected proximate to an output of said homogenizer; and  
wherein said transmitting further comprises transmitting light from said light source  
15 through said waveguide so as to produce the substantially uniform profile for introduction into said at least one optical fiber, wherein said at least one optical fiber is not damaged by said light.
- 20 11. The method according to claim 10, wherein said light source provides light having a substantially non-uniform intensity profile.
12. The method according to claim 11, wherein the non-uniform intensity profile is gaussian-like.
- 25 13. The method according to claim 10, wherein the waveguide has an optical axis, and a polygonal cross-section at least partially along said optical axis.
14. The method according to claim 13, wherein said polygonal cross-section has up to ten sides.
- 30 15. The method according to claim 13, wherein said optical waveguide further comprises a substantially circular cross-section at least partially along said optical axis.

16. The method according to claim 13, wherein along the optical axis of said optical waveguide, the polygonal cross-section smoothly transitions to a substantially circular cross-section.

5 17. The method according to claim 13, wherein the waveguide has  
a length along the optical axis;  
a first and second surface, each surface placed at opposite ends of the length, and each  
having an area; and  
said first and second surfaces having different areas.

10 18. The method according to claim 17, wherein along the length of said optical waveguide, the polygonal cross-section smoothly transitions to a substantially circular cross-section, and the area of the first surface smoothly transitions to the area of the second surface.

15 19. The method according to claim 13, wherein said step of emitting light includes condensing light from a point source.

20. A fiber optic illumination system for carrying out the method of claim 1,  
comprising:  
20 a light source;  
a waveguide having an input end, an output end, and an optical axis, said input end being  
placed in proximity to said light source such that a substantial amount of light is coupled into the  
waveguide, travels along the optical axis, and exits through the output end, said exiting light  
having a substantially uniform intensity profile at the output end, and wherein said waveguide  
25 has a polygonal cross-section at least partially along said optical axis; - at least one output  
fiber optic placed proximate to said output end such that the light exiting from said output end is  
coupled into said at least one output fiber optic with high efficiency.

21. The fiber optic illumination system according to claim 20, wherein said  
30 waveguide is comprised of materials selected from the group consisting of quartz, glass and  
plastic.

22. The fiber optic illumination system according to claim 20, wherein said polygonal cross-section is regular, and is comprised of up to 10 sides.

23. A fiber optic homogenizer for carrying out the method of claim 1, comprising:  
5 a first waveguide having a first input end corresponding to a first input area, a first output end corresponding to a first output area, and a first optical axis having a cross-sectional shape substantially of a polygon, and wherein said first input end and said first output end are substantially perpendicular to said first optical axis;

a second waveguide having a second input end corresponding to a second input area, a  
10 second output end corresponding to a second output area, and a second optical axis having a cross-sectional shape substantially of a circle, and wherein said second optical axis is substantially collinear to said first optical axis, and said second input end of said second waveguide is placed in close proximity to the first output end of said first waveguide.

24. The fiber optic homogenizer of claim 23, wherein said first output area of said first waveguide is completely contained within said second input area of said second waveguide.

25. The fiber optic homogenizer of claim 23, wherein said first input area is equal to said first output area.

26. The fiber optic homogenizer of claim 23, wherein said second input area is equal to said second output area.

27. The fiber optic homogenizer of claim 23, wherein said first input area is smaller  
25 than said first output area.

28. The fiber optic homogenizer of claim 23, wherein said first input area is larger than said first output area.

29. The fiber optic homogenizer of claim 23, wherein said second input area is  
30 smaller than said second output area.

30. The fiber optic homogenizer of claim 23, wherein said second input area is larger than said second output area.

31. The fiber optic homogenizer of claim 23, wherein said first output end of said first  
5 waveguide and said second input end of said second waveguide are physically joined together with a smooth transition so as to form a unitary waveguide.

32. The fiber optic homogenizer of claim 23, wherein said first waveguide has a  
cross-sectional shape substantially of a regular polygon comprising up to ten sides.  
10

33. A fiber optic illumination system for carrying out the method of claim 1,  
comprising:  
an arc lamp;  
15 a primary reflector for collecting and focusing light collected from said arc lamp to a  
focus;  
a polygonal rod with a first input end and a first output end, said polygonal rod placed  
with the input end coincident with said focus so as to receive an optimal amount of light  
collected by said primary reflector,  
20 an output fiber optic with a second input end and a second output end, said second input  
end coupled to said first output end of said polygonal rod such that substantially all the light  
exiting the polygonal rod's first output end is coupled into said output fiber.

34. The fiber optic illumination system of claim 33, wherein said primary reflector is  
25 comprised of a reflector selected from the group consisting of a spherical reflector, an ellipsoidal  
reflector, and a toroidal reflector.


35. The fiber optic illumination system of claim 33, wherein the polygonal rod is  
comprised of a material selected from the group consisting of quartz, glass, and plastic.  
30

36. The fiber optic illumination system of claim 33, wherein the output fiber optic is selected from the group consisting of a plastic fiber, a bundle of plastic fibers, a single glass fiber, and a glass fiber bundle.

5 37. The fiber optic illumination system of claim 33, wherein the polygonal rod is tapered.


38. The fiber optic illumination system of claim 33, wherein the polygonal rod has a square cross-section, said first input end having a cross-section with a side length of about 2mm, 10 said first output end having a cross-section with a side length of about 3.5mm, and wherein said polygonal rod has an axial length extending from said first input end to said first output end, and said axial length is about 35mm.

39. The fiber optic illumination system of claim 33, further comprising a round rod 15 having a third input end and a third output end, said round rod placed between said first output end of said polygonal rod and said second input end of said output fiber optic such that light is coupled from said first output end of said polygonal rod and into said third input end of said round rod, and such that light is coupled from said third output end of said round rod and into said second input end of said output fiber optic.

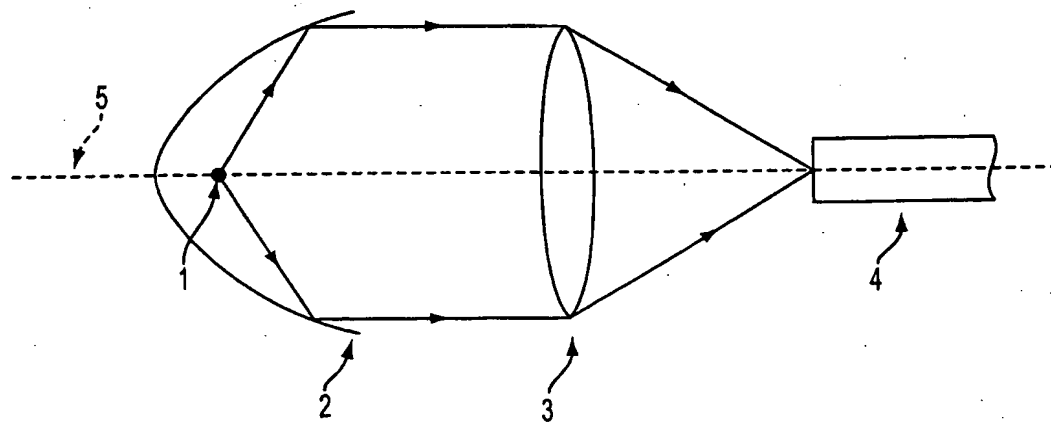


**FIG. 1**  
(PRIOR ART)



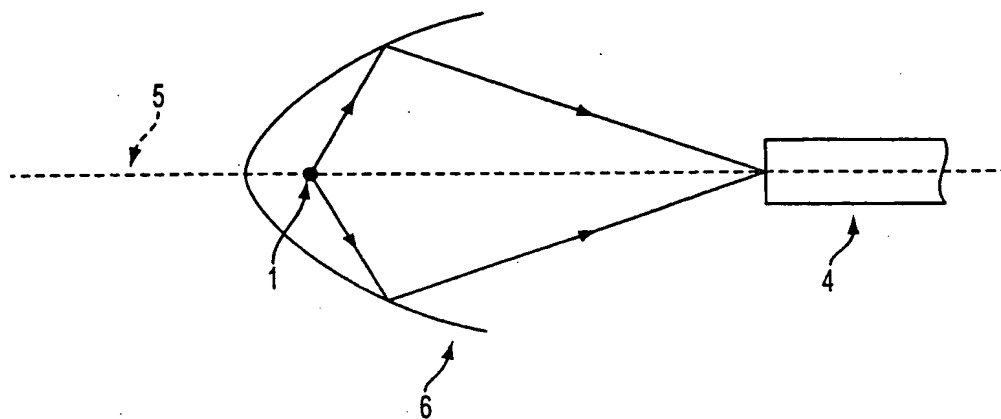

**FIG. 2**  
(PRIOR ART)

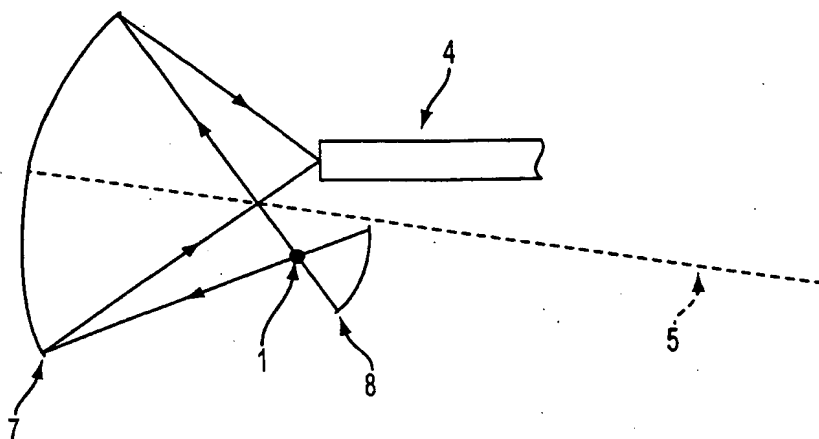

**FIG. 3**  
(PRIOR ART)

4/16

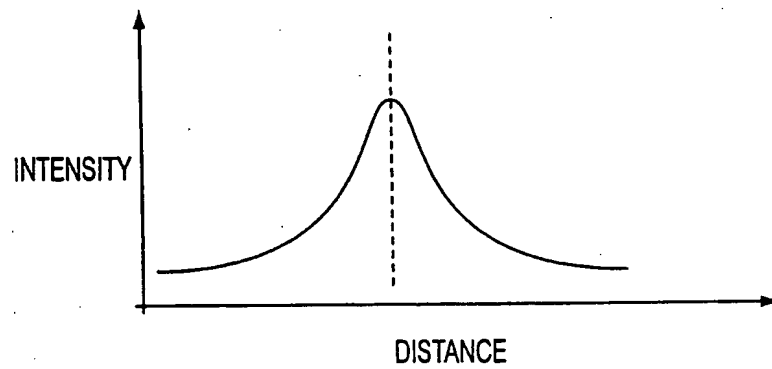


FIG. 4

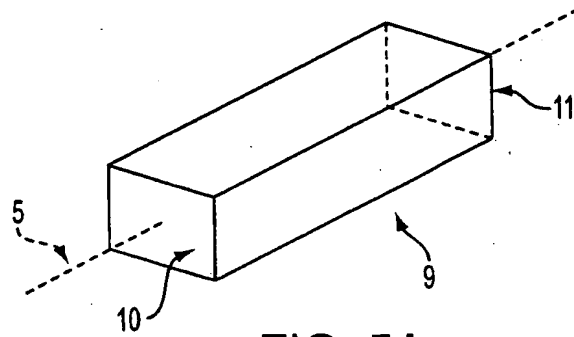


FIG. 5A

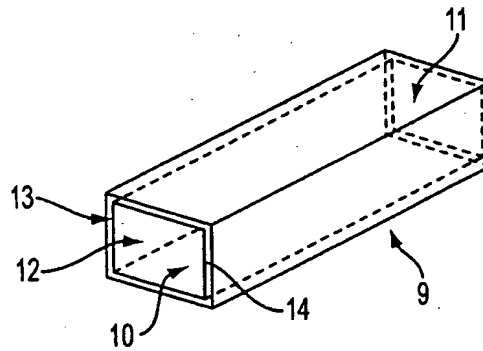


FIG. 5B

6/16

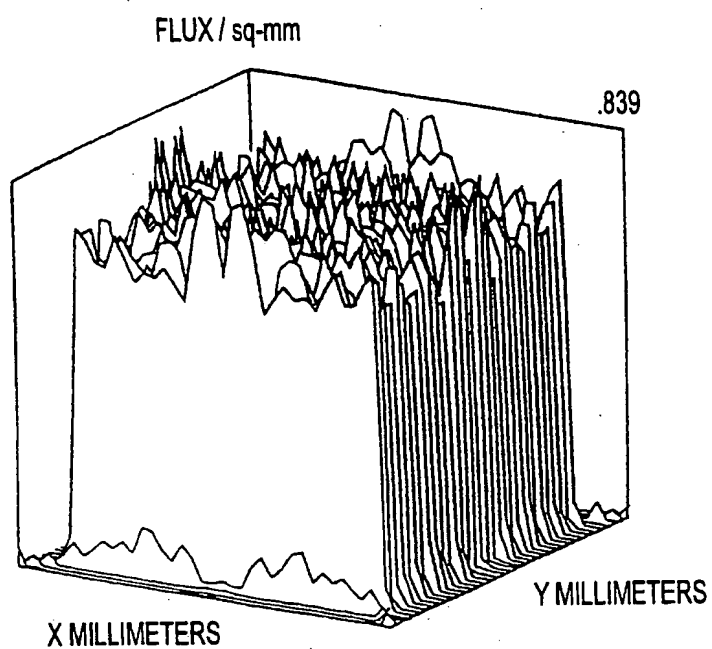


FIG. 6

7/16

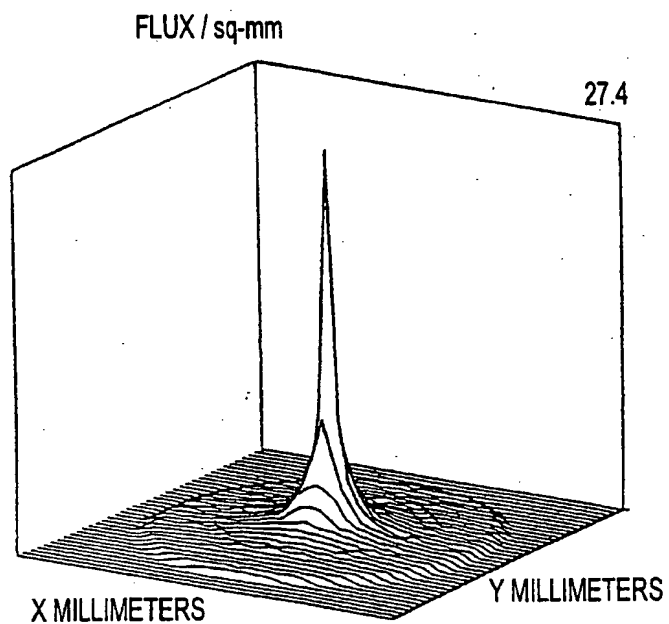


FIG. 7




FIG. 8A



FIG. 8B




FIG. 8C




FIG. 8D




FIG. 8E




FIG. 8F

9/16

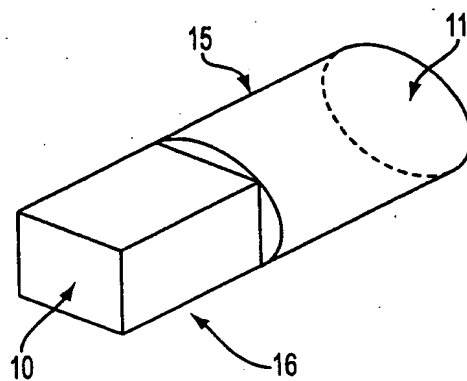


FIG. 9A




FIG. 9B



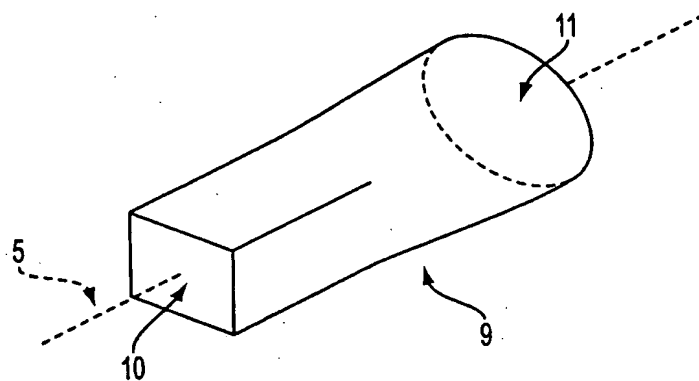


FIG. 10

11/16

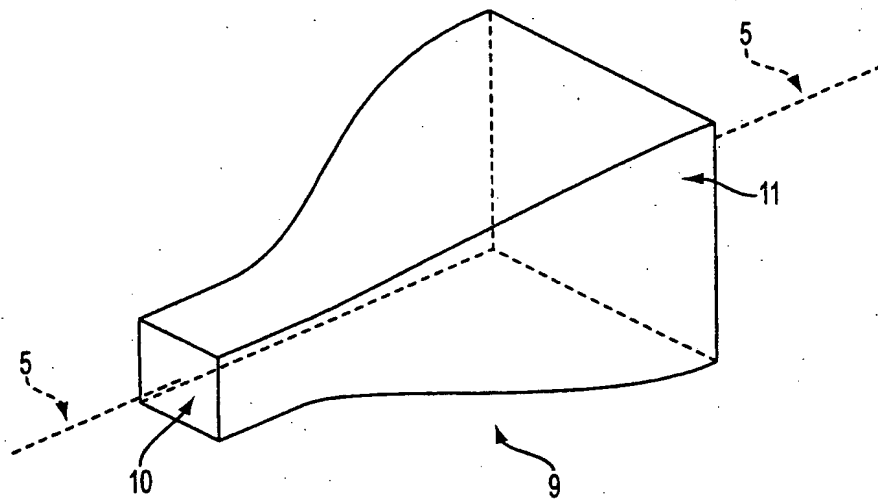


FIG. 11

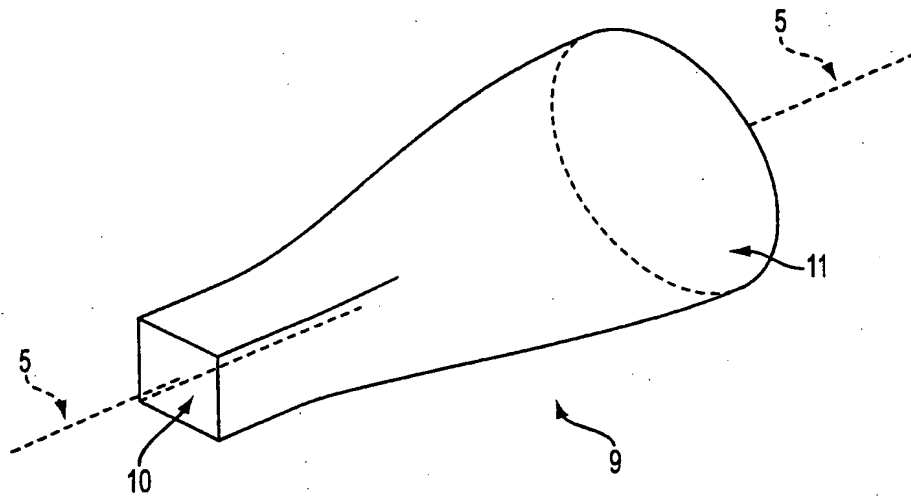


FIG. 12

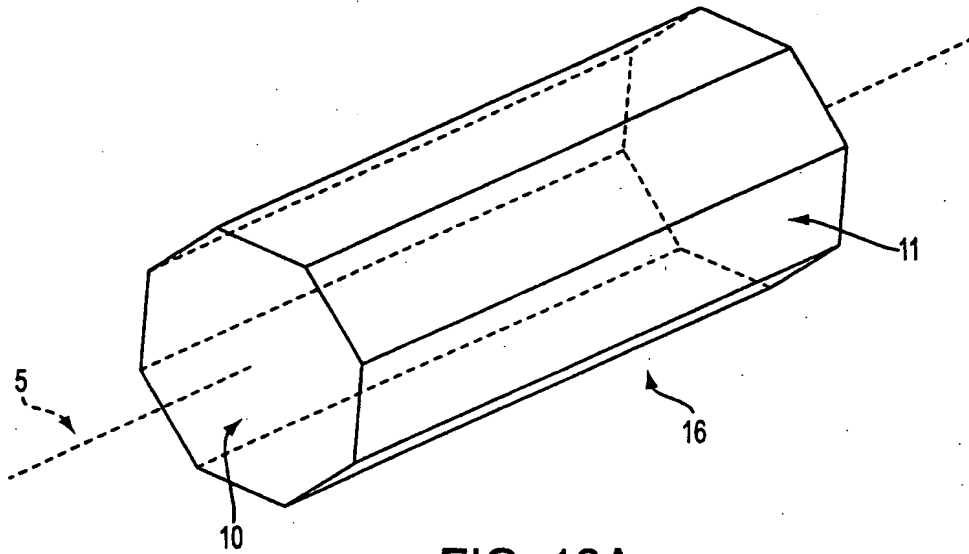


FIG. 13A

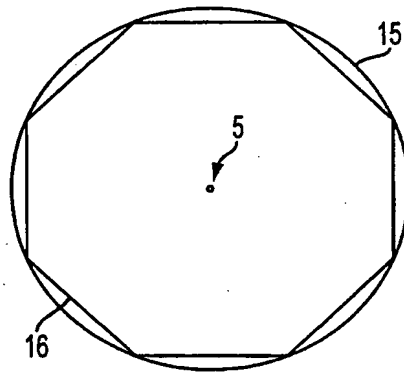


FIG. 13B

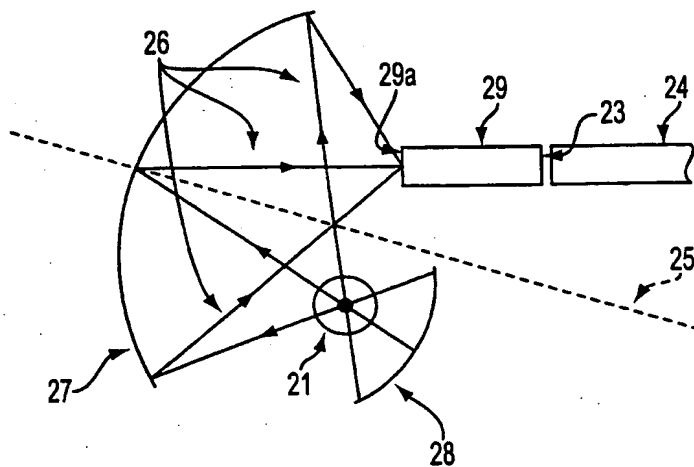


FIG. 14

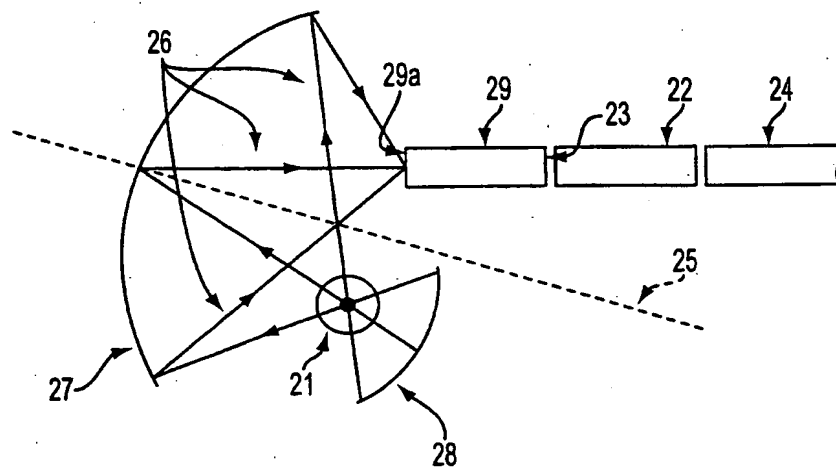


FIG. 15

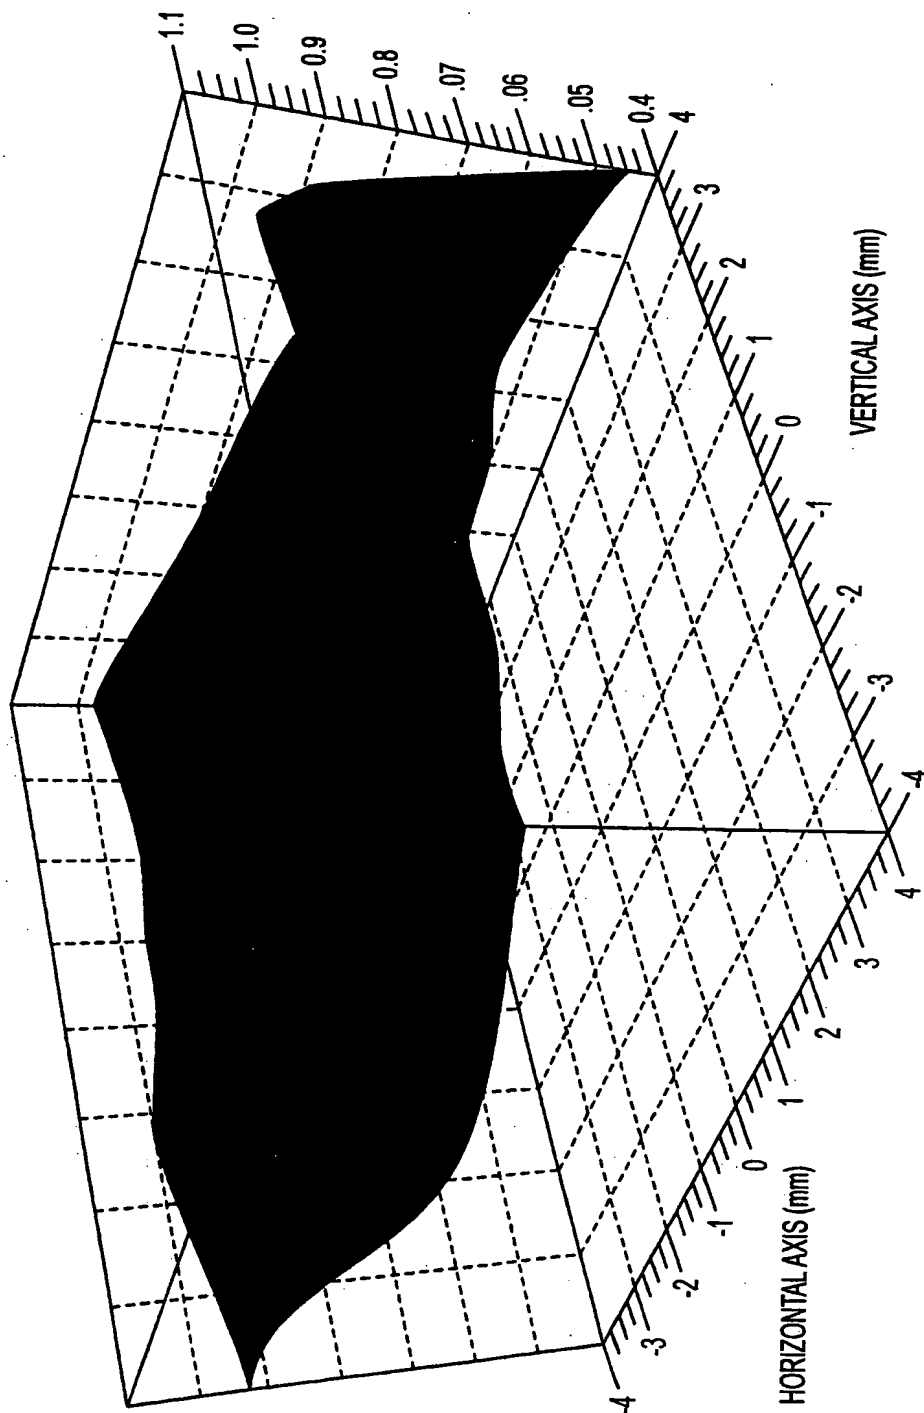


FIG. 16

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 00/33511

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 G02B6/42 G02B6/26

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
EPO-Internal, WPI Data, PAJ, INSPEC

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 562 873 A (GEN ELECTRIC) 29 September 1993 (1993-09-29)  column 1, line 30 -column 2, line 13 column 2, line 42 -column 3, line 9 column 5, line 24 -column 6, line 7; figures 1,10	1-4,7, 9-14,17, 19-22, 33-38
Y	---	5,6,8, 15,16, 18, 23-32,39
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*A\* document member of the same patent family

Date of the actual completion of the international search

19 February 2001

Date of mailing of the international search report

28/02/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5618 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Lord, R



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/33511

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 197 19 728 A (NATH GUENTHER) 12 November 1998 (1998-11-12)  column 1, line 58 -column 3, line 7; figure 3	1-4, 9-14, 19-22, 33-36
Y	US 4 932 747 A (RUSSELL STEPHEN D ET AL) 12 June 1990 (1990-06-12)  column 2, line 43 -column 3, line 29; claim 1; figures 3,5	5,6,8, 15,16, 18, 23-32,39
A	FR 2 738 082 A (QUANTEL) 28 February 1997 (1997-02-28) page 4, line 8 -page 5, line 2; figure 1	1,20,23, 33
A	US 4 744 615 A (FAN BUNSEN ET AL) 17 May 1988 (1988-05-17) column 1, line 53 - line 68; figure 1	1,20,23, 33

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/33511

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0562873 A	29-09-1993	US 5341445 A	23-08-1994
		CA 2089300 A	28-09-1993
		DE 69319770 D	27-08-1998
		DE 69319770 T	11-02-1999
		JP 2672762 B	05-11-1997
		JP 6167631 A	14-06-1994
DE 19719728 A	12-11-1998	NONE	
US 4932747 A	12-06-1990	NONE	
FR 2738082 A	28-02-1997	FR 2739982 A	18-04-1997
US 4744615 A	17-05-1988	BR 8606399 A	13-10-1987
		CA 1264712 A	23-01-1990
		DE 3778387 A	27-05-1992
		EP 0230931 A	05-08-1987
		ES 2031835 T	01-01-1993
		JP 1886501 C	22-11-1994
		JP 5061602 B	06-09-1993
		JP 62178904 A	06-08-1987

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**